

Technical drawing of a mechanical assembly, showing three views: a side view, a cross-section A-A, and a front view F.

Side View Dimensions and Features:

- Top dimensions: 58, 33, 20, 5, 5.6, (28)
- Bottom dimensions: 10, 27.5, 13.5, 0.5, 60, (n-1)x60, L2, L1, 12
- Internal dimensions: 10x1.2 DP, 4-M3x0.5Px4.5 DP, 2-M2.6x0.45Px4.5 DP
- Threaded features: 2xn-Ø3.4 THRU, Ø6.5x3 DP, 2x2-M2.6x0.45Px4 DP, 2x2-M3x0.5Px6 DP
- Force F is applied to the right.


Cross-section A-A Dimensions:

- Top dimensions: 26, 18, 18, 11, 2
- Bottom dimensions: 40, 13, 13.5
- Internal dimensions: 20, 18


Front View F Dimensions and Features:

- Top dimensions: 40, 40, 40
- Bottom dimensions: 40, 40
- Internal dimensions: 40, 40
- Threaded features: 4-M3x0.5Px6.5 DP, P.C.D.45, 45°, 45°, Ø30^{+0.05}₀ THRU

KK50-F0

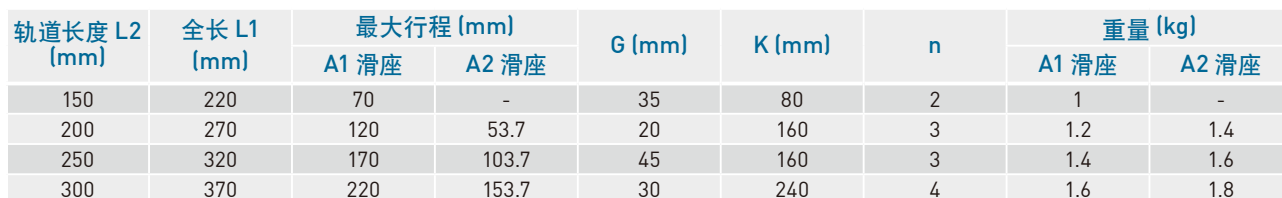


KK50-FD

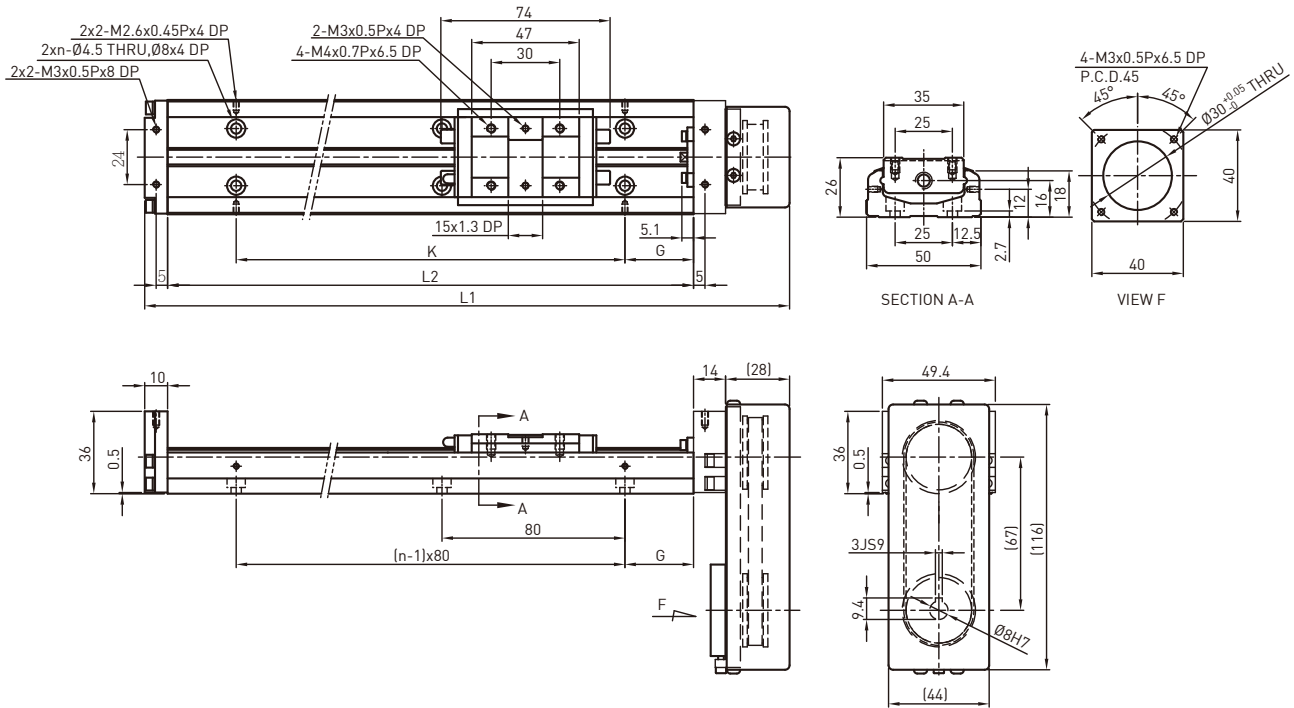


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
150	202	70	-	35	80	2	1.5	-
200	250	120	53.7	20	160	3	1.7	1.9
250	302	170	103.7	45	160	3	1.9	2.1
300	352	220	153.7	30	240	4	2.1	2.3

KK50-FL

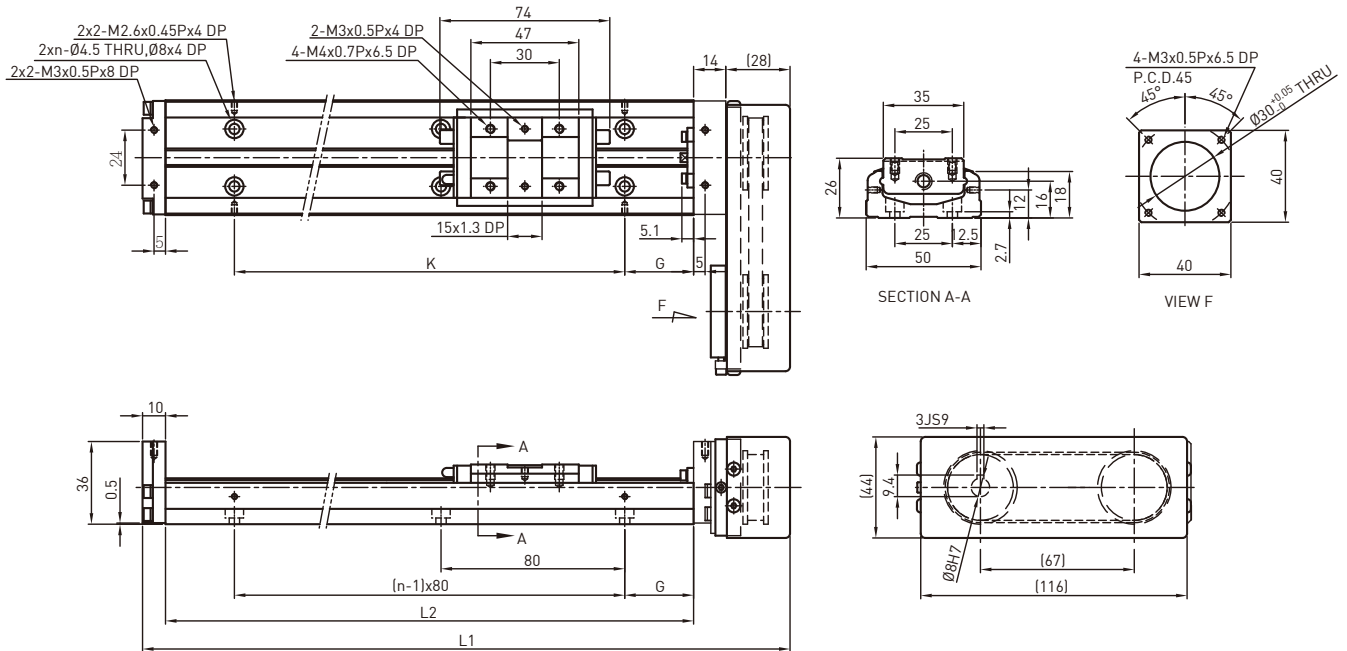


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
150	202	70	-	35	80	2	1.5	-
200	250	120	53.7	20	160	3	1.7	1.9
250	302	170	103.7	45	160	3	1.9	2.1
300	352	220	153.7	30	240	4	2.1	2.3

KK50-FR

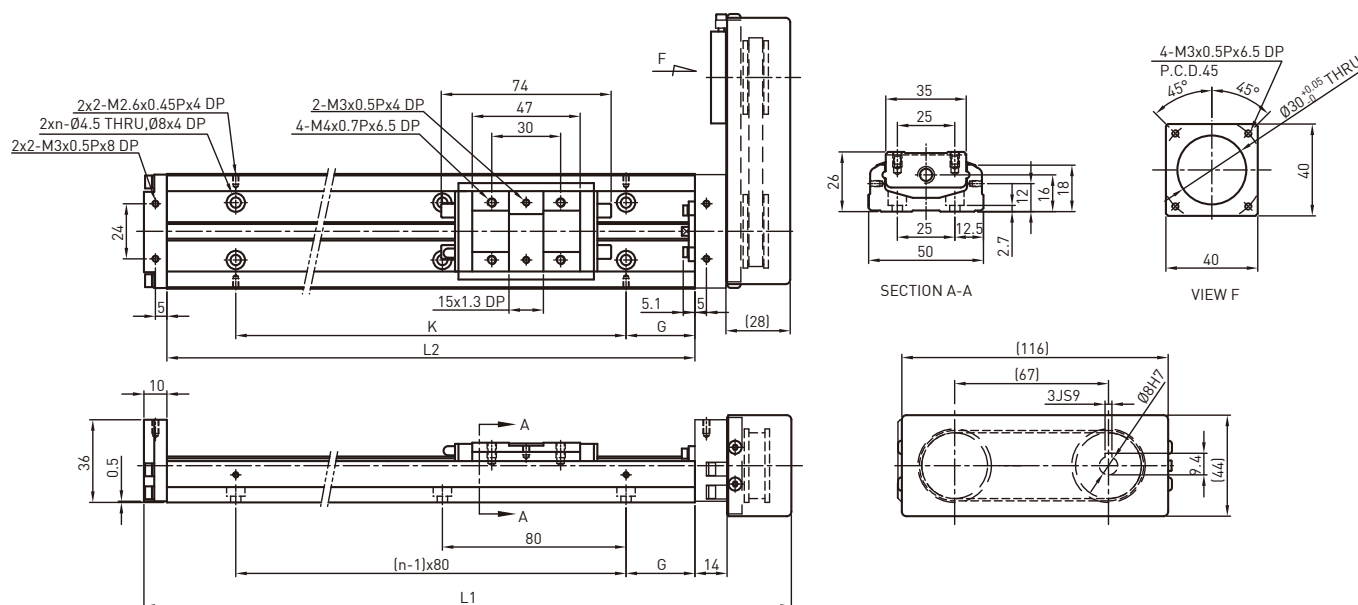

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
150	202	70	-	35	80	2	1.5	-
200	250	120	53.7	20	160	3	1.7	1.9
250	302	170	103.7	45	160	3	1.9	2.1
300	352	220	153.7	30	240	4	2.1	2.3

KK60 (标准型)

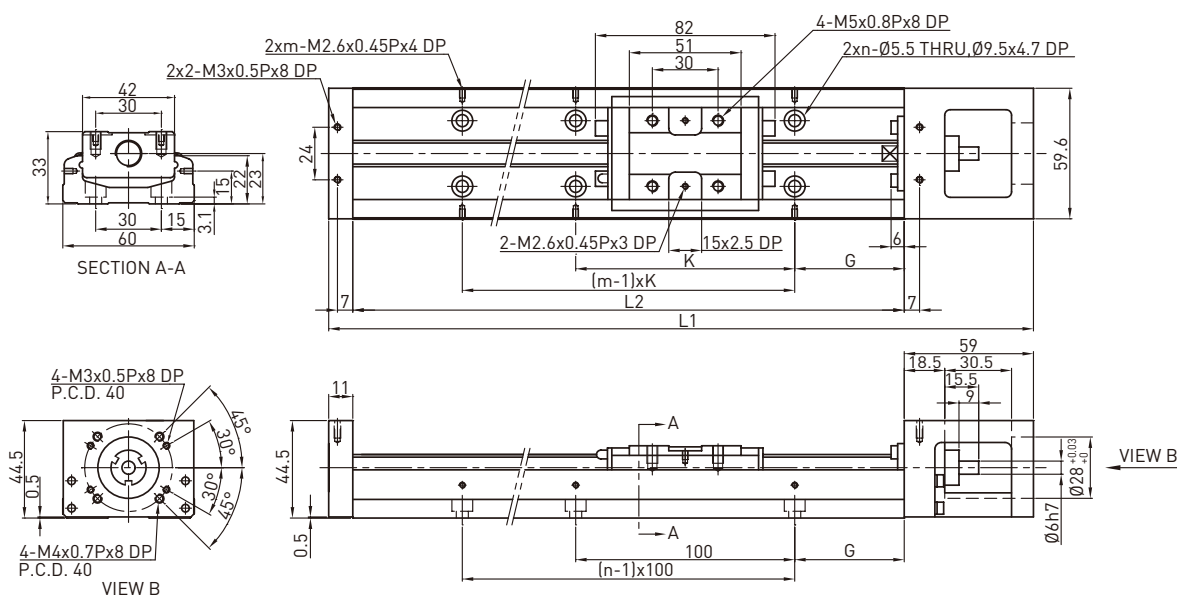

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	220	60	-	25	100	2	2	1.5	-
200	270	110	-	50	100	2	2	1.8	-
300	370	210	135	50	200	3	2	2.4	2.7
400	470	310	235	50	100	4	4	3	3.3
500	570	410	335	50	200	5	3	3.6	3.9
600	670	510	435	50	100	6	6	4.2	4.6