

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
150	202	70	-	35	80	2	1.5	-
200	250	120	53.7	20	160	3	1.7	1.9
250	302	170	103.7	45	160	3	1.9	2.1
300	352	220	153.7	30	240	4	2.1	2.3

[illegible]

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	220	60	-	25	100	2	2	1.5	-
200	270	110	-	50	100	2	2	1.8	-
300	370	210	135	50	200	3	2	2.4	2.7
400	470	310	235	50	100	4	4	3	3.3
500	570	410	335	50	200	5	3	3.6	3.9
600	670	510	435	50	100	6	6	4.2	4.6

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座					S1 滑座	S2 滑座
150	220	85	34	25	100	2	2	1.4	1.6
200	270	135	84	50	100	2	2	1.7	1.9
300	370	235	184	50	200	3	2	2.3	2.5
400	470	335	284	50	100	4	4	2.9	3.1
500	570	435	384	50	200	5	3	3.5	3.7
600	670	535	484	50	100	6	6	4.1	4.3

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	220	60	-	25	100	2	2	1.5	-
200	270	110	-	50	100	2	2	1.8	-
300	370	210	135	50	200	3	2	2.4	2.7
400	470	310	235	50	100	4	4	3	3.3
500	570	410	335	50	200	5	3	3.6	3.9
600	670	510	435	50	100	6	6	4.2	4.6


Technical drawing of the 2000 Series End Plate Assembly, showing front and side views with dimensions and callouts.

Front View Dimensions and Callouts:

- Top dimensions: 82, 51, 30, 15x2.5 DP
- Left callouts: 2-M2.6x0.45Px3 DP, 2xm-M2.6x0.45Px4 DP, 2xn-Ø5.5 THRU, Ø9.5x4.7 DP
- Internal callouts: 4-M5x0.8Px8 DP, 2-M3x0.5Px8 DP
- Bottom dimensions: 24, 7, K, G, 6, 7, L2, L1
- Right dimension: 59.6

Side View Dimensions and Callouts:


- Top dimensions: 11, 15, (35)
- Left dimensions: 44.5, 0.5
- Internal callouts: A, A
- Bottom dimensions: 100, G, F
- Bottom callouts: [n-1]x100, 2-M3x0.5Px8 DP

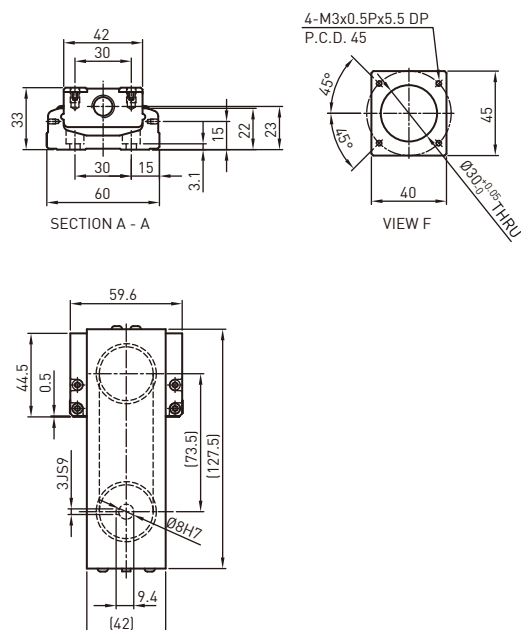

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	211	60	-	25	100	2	2	2	-
200	261	110	-	50	100	2	2	2.3	-
300	361	210	135	50	200	3	2	2.9	3.2
400	461	310	235	50	100	4	4	3.5	3.8
500	561	410	335	50	200	5	3	4.1	4.4
600	661	510	435	50	100	6	6	4.7	5.1


The technical drawing illustrates a linear guide assembly with two views:

- Top View:** Shows the main body with dimensions 82, 51, 30, 15x2.5 DP, [35], 6, 7, K, G, F, [m-1]xK, 24, 7, and 2xm-M2.6x0.45Px4 DP. It also indicates 2xn-Ø5.5 THRU, Ø9.5x4.7 DP.
- Side View:** Shows the profile with dimensions 11, 44.5, 0.5, A, 100, G, 15, [n-1]x100, L2, and L1. It also indicates 2x2-M3x0.5Px8 DP.

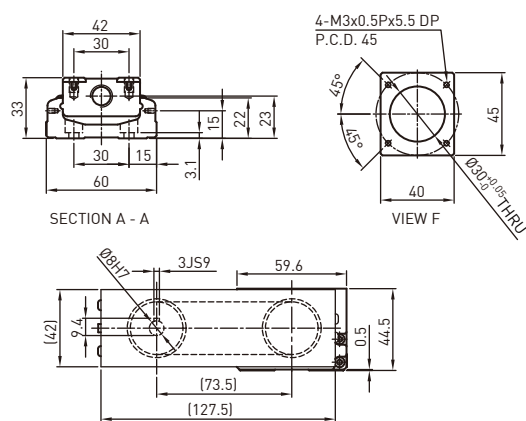


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	211	60	-	25	100	2	2	2	-
200	261	110	-	50	100	2	2	2.3	-
300	361	210	135	50	200	3	2	2.9	3.2
400	461	310	235	50	100	4	4	3.5	3.8
500	561	410	335	50	200	5	3	4.1	4.4
600	661	510	435	50	100	6	6	4.7	5.1

KK60D-FR (标准型)





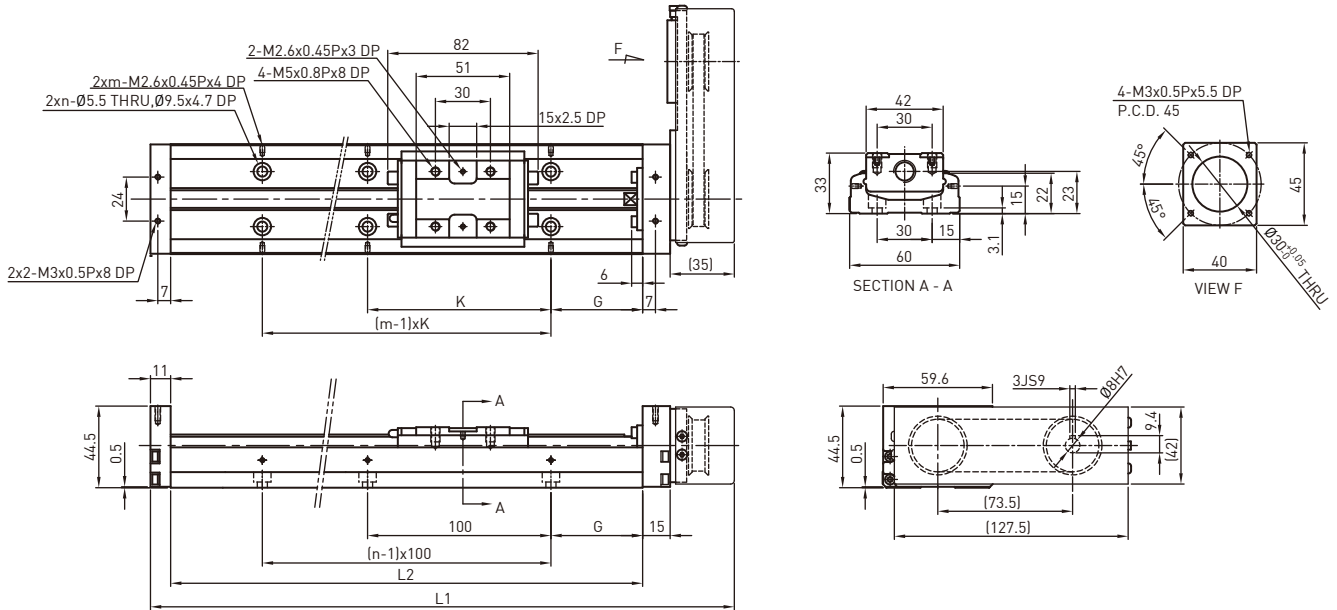


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
150	211	60	-	25	100	2	2	2	-
200	261	110	-	50	100	2	2	2.3	-
300	361	210	135	50	200	3	2	2.9	3.2
400	461	310	235	50	100	4	4	3.5	3.8
500	561	410	335	50	200	5	3	4.1	4.4
600	661	510	435	50	100	6	6	4.7	5.1


KK60D-F0 (轻载型)

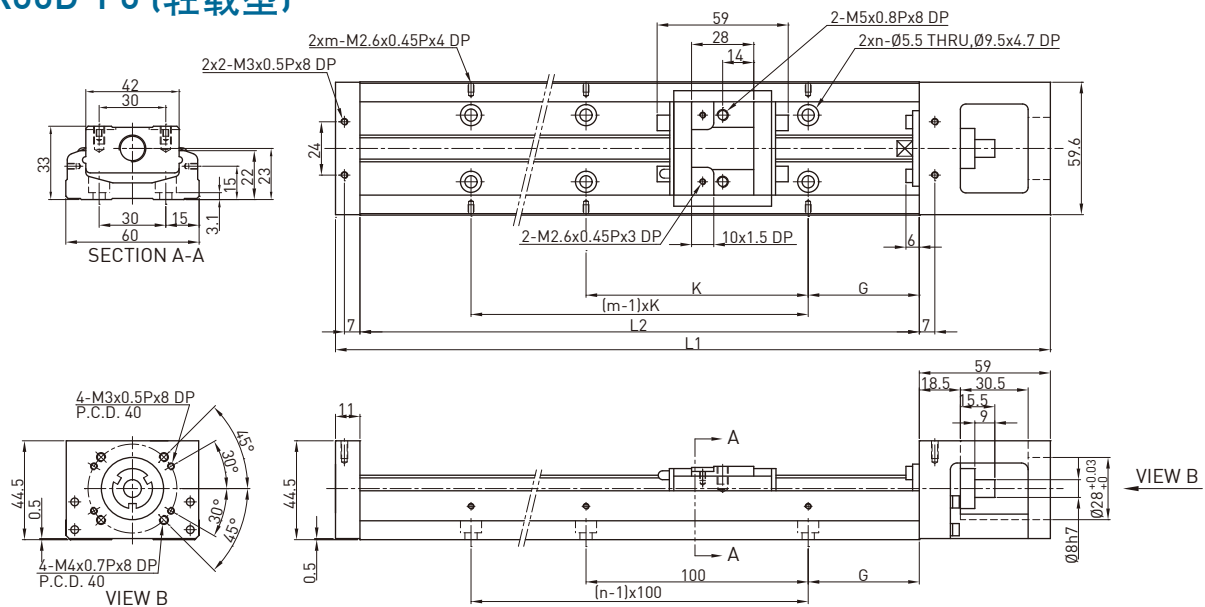

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座					S1 滑座	S2 滑座
150	220	85	34	25	100	2	2	1.4	1.6
200	270	135	84	50	100	2	2	1.7	1.9
300	370	235	184	50	200	3	2	2.3	2.5
400	470	335	284	50	100	4	4	2.8	3.1
500	570	435	384	50	200	5	3	3.5	3.7
600	670	535	484	50	100	6	6	4.1	4.3




KK60D-FR (轻载型)

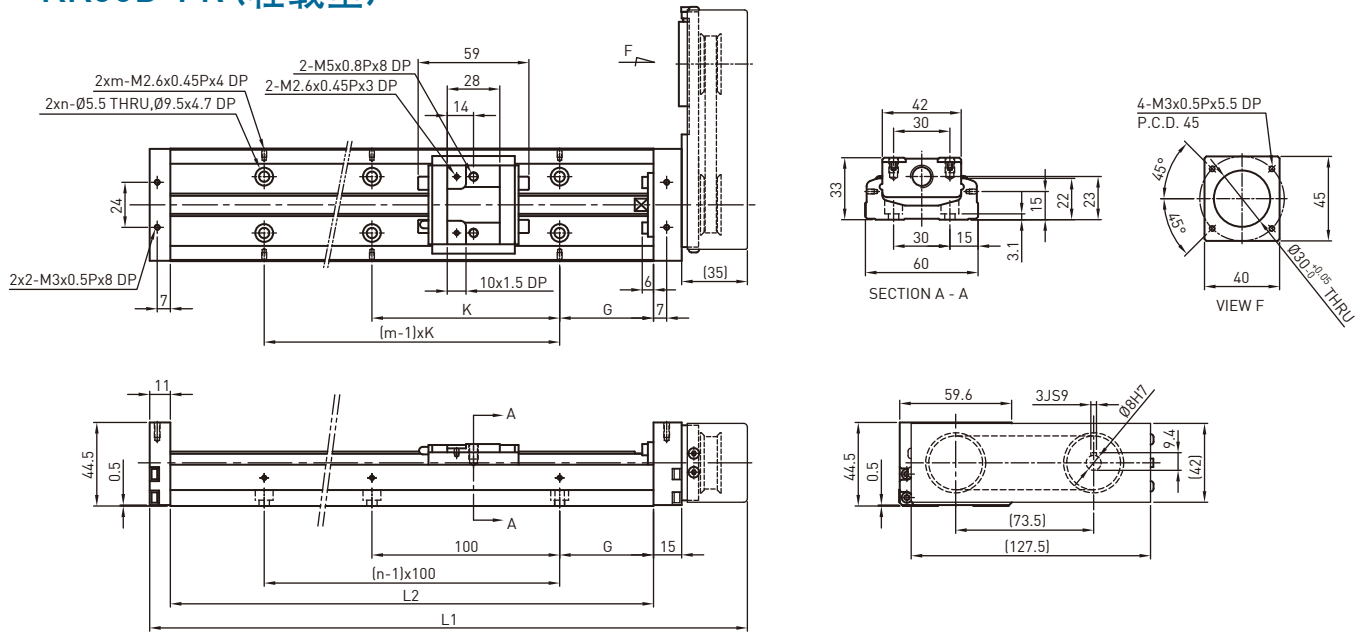

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座					S1 滑座	S2 滑座
150	211	85	34	25	100	2	2	1.9	2.1
200	261	135	84	50	100	2	2	2.2	2.4
300	361	235	184	50	200	3	2	2.8	3
400	461	335	284	50	100	4	4	3.3	3.6
500	561	435	384	50	200	5	3	4	4.2
600	661	535	484	50	100	6	6	4.6	4.8

KK80-F0 (标准型)

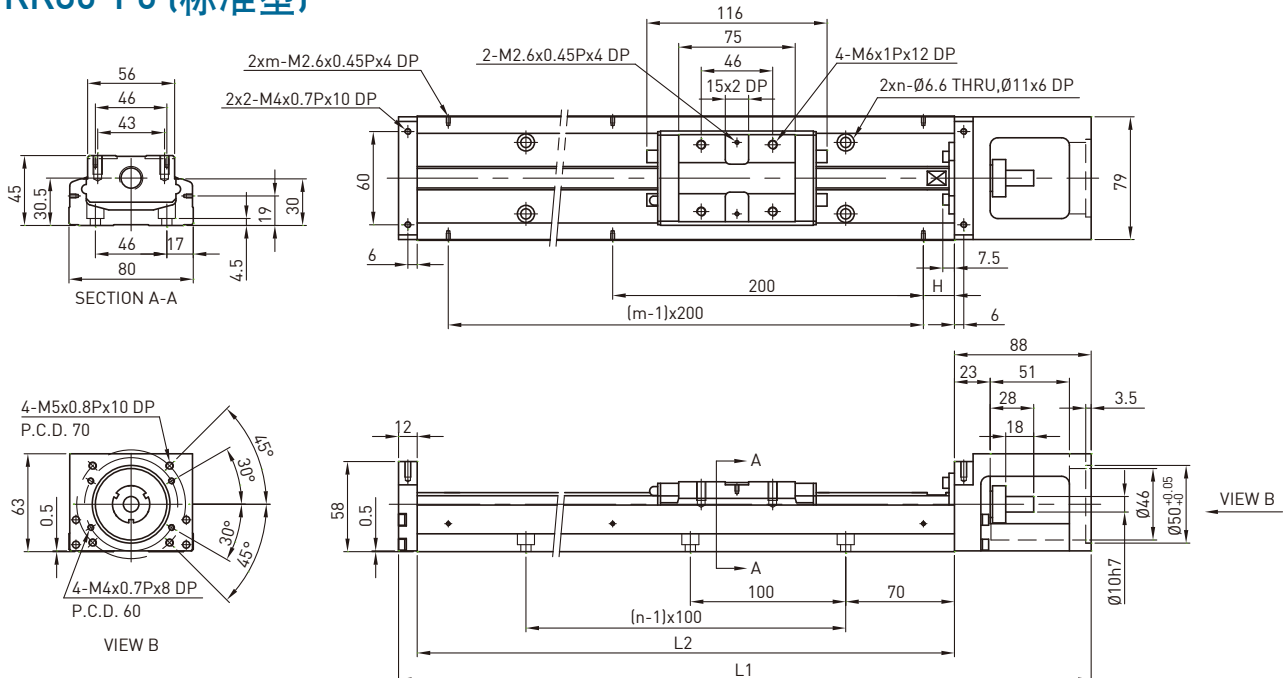

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	440	216.5	108.5	70	3	2	5.3	6
440	540	316.5	208.5	20	4	3	6.5	7.2
540	640	416.5	308.5	70	5	3	7.6	8.3
640	740	516.5	408.5	20	6	4	8.8	9.5
740	840	616.5	508.5	70	7	4	10	10.7
840	940	716.5	608.5	20	8	5	11.2	11.9
940	1040	816.5	708.5	70	9	5	12.4	13.1