



KK60D-FR (轻载型)

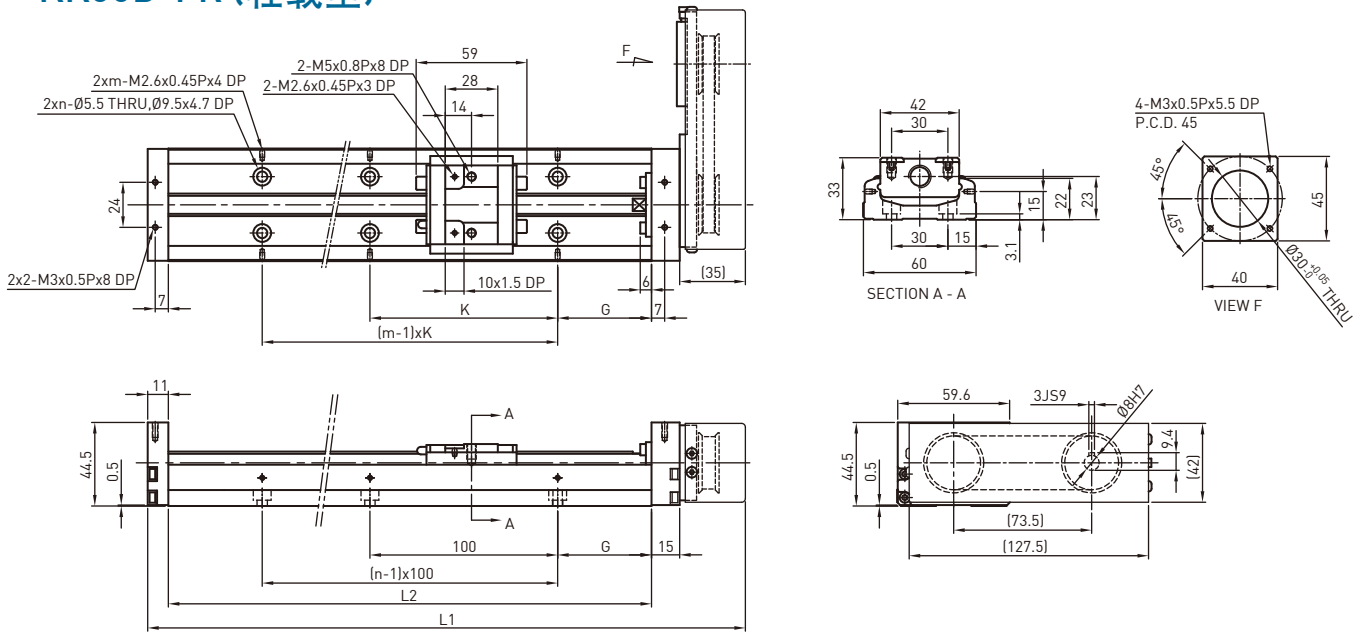


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	K (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座					S1 滑座	S2 滑座
150	211	85	34	25	100	2	2	1.9	2.1
200	261	135	84	50	100	2	2	2.2	2.4
300	361	235	184	50	200	3	2	2.8	3
400	461	335	284	50	100	4	4	3.3	3.6
500	561	435	384	50	200	5	3	4	4.2
600	661	535	484	50	100	6	6	4.6	4.8

KK80-F0 (标准型)

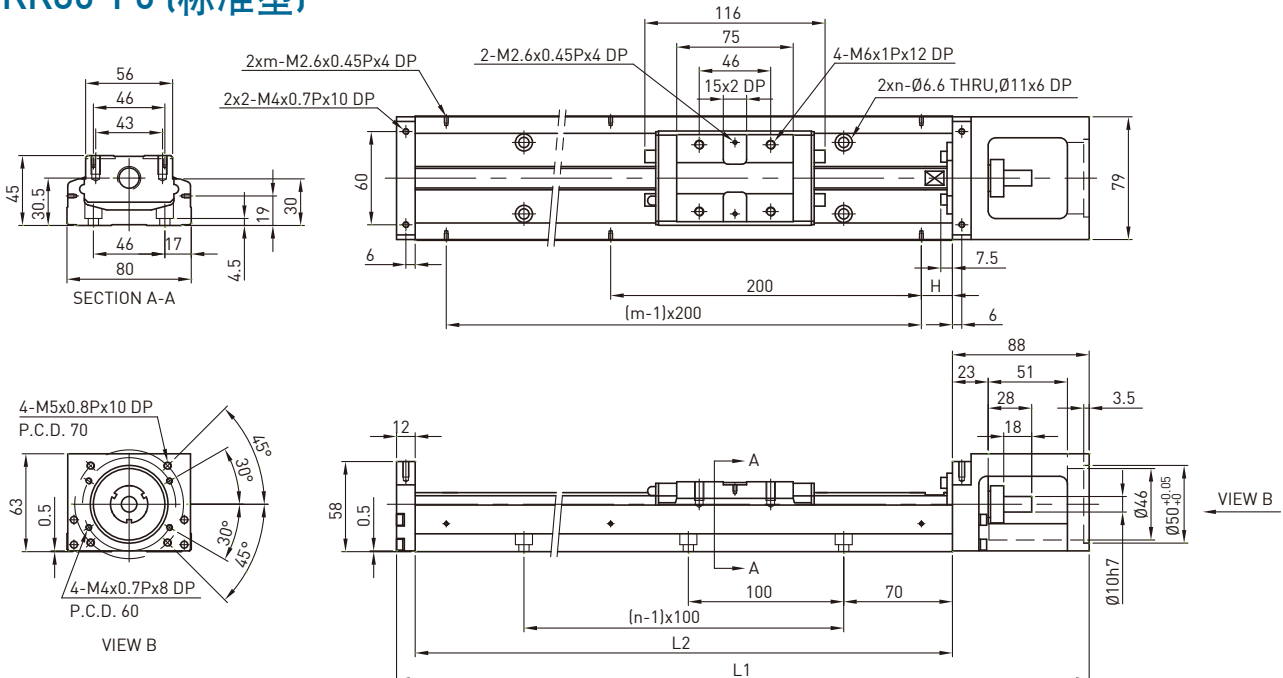


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	440	216.5	108.5	70	3	2	5.3	6
440	540	316.5	208.5	20	4	3	6.5	7.2
540	640	416.5	308.5	70	5	3	7.6	8.3
640	740	516.5	408.5	20	6	4	8.8	9.5
740	840	616.5	508.5	70	7	4	10	10.7
840	940	716.5	608.5	20	8	5	11.2	11.9
940	1040	816.5	708.5	70	9	5	12.4	13.1

KK80-FD (标准型)

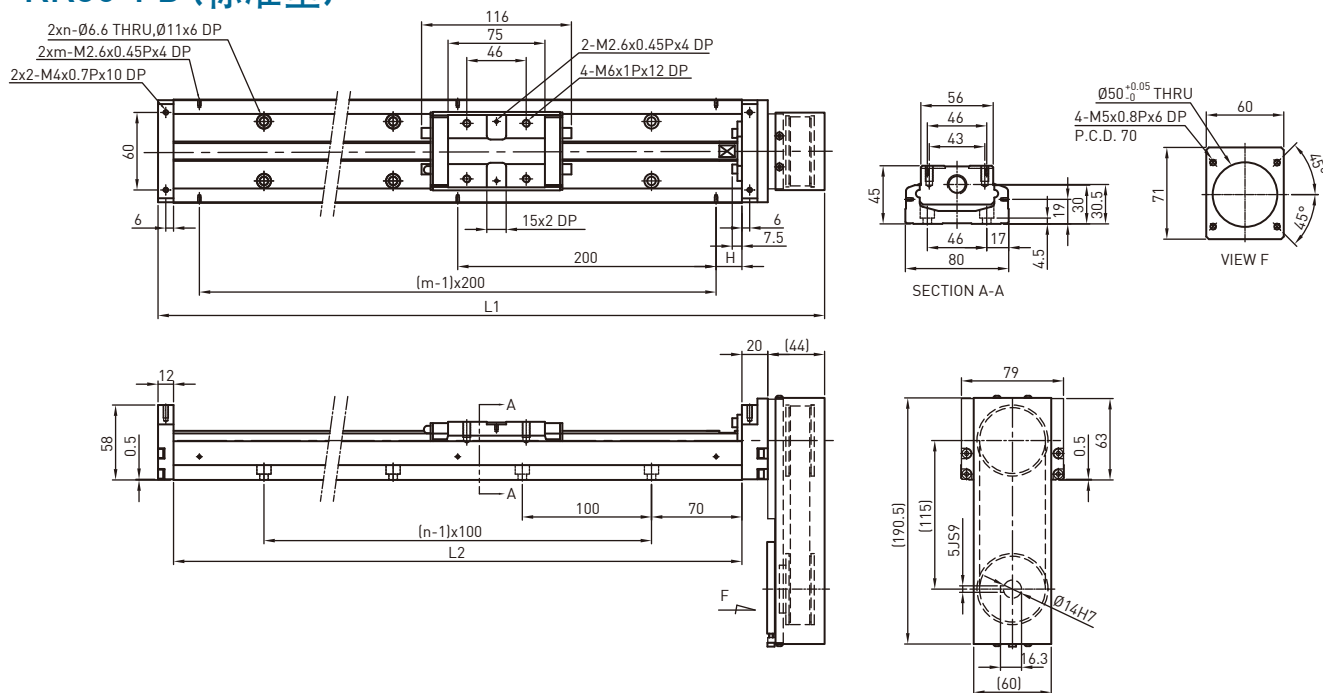


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	416	216.5	108.5	70	3	2	6.1	6.8
440	516	316.5	208.5	20	4	3	7.3	8
540	616	416.5	308.5	70	5	3	8.4	9.1
640	716	516.5	408.5	20	6	4	9.6	10.3
740	816	616.5	508.5	70	7	4	10.8	11.5
840	916	716.5	608.5	20	8	5	12	12.7
940	1016	816.5	708.5	70	9	5	13.2	13.9

KK80-FL (标准型)

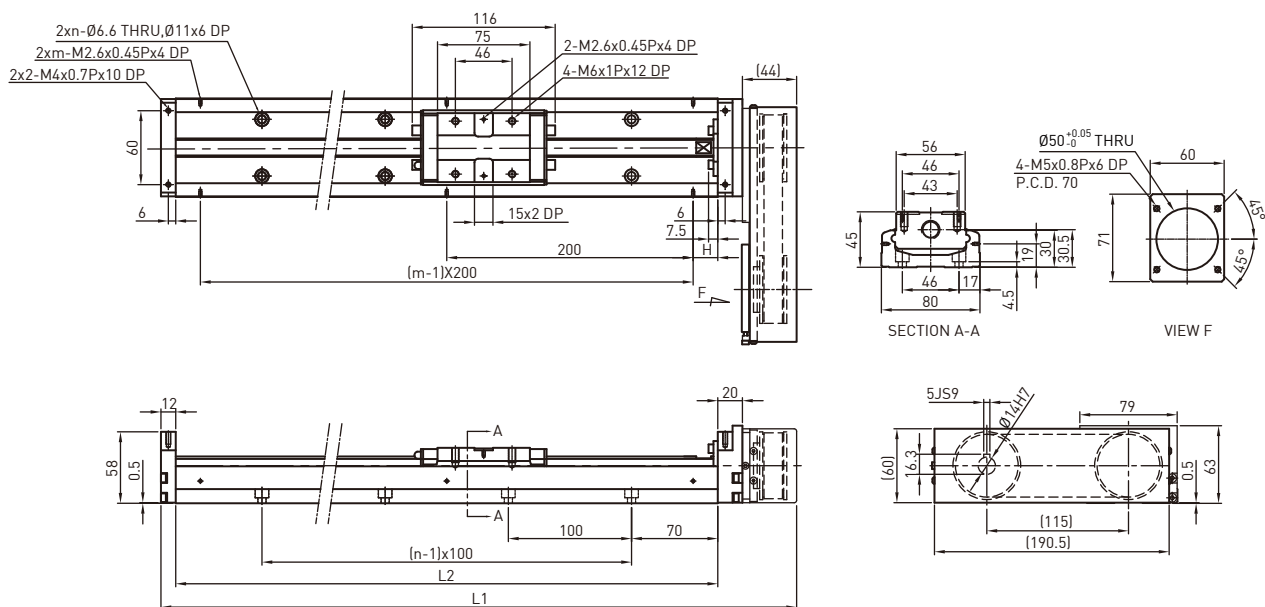


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	416	216.5	108.5	70	3	2	6.1	6.8
440	516	316.5	208.5	20	4	3	7.3	8
540	616	416.5	308.5	70	5	3	8.4	9.1
640	716	516.5	408.5	20	6	4	9.6	10.3
740	816	616.5	508.5	70	7	4	10.8	11.5
840	916	716.5	608.5	20	8	5	12	12.7
940	1016	816.5	708.5	70	9	5	13.2	13.9

KK80-FR (标准型)

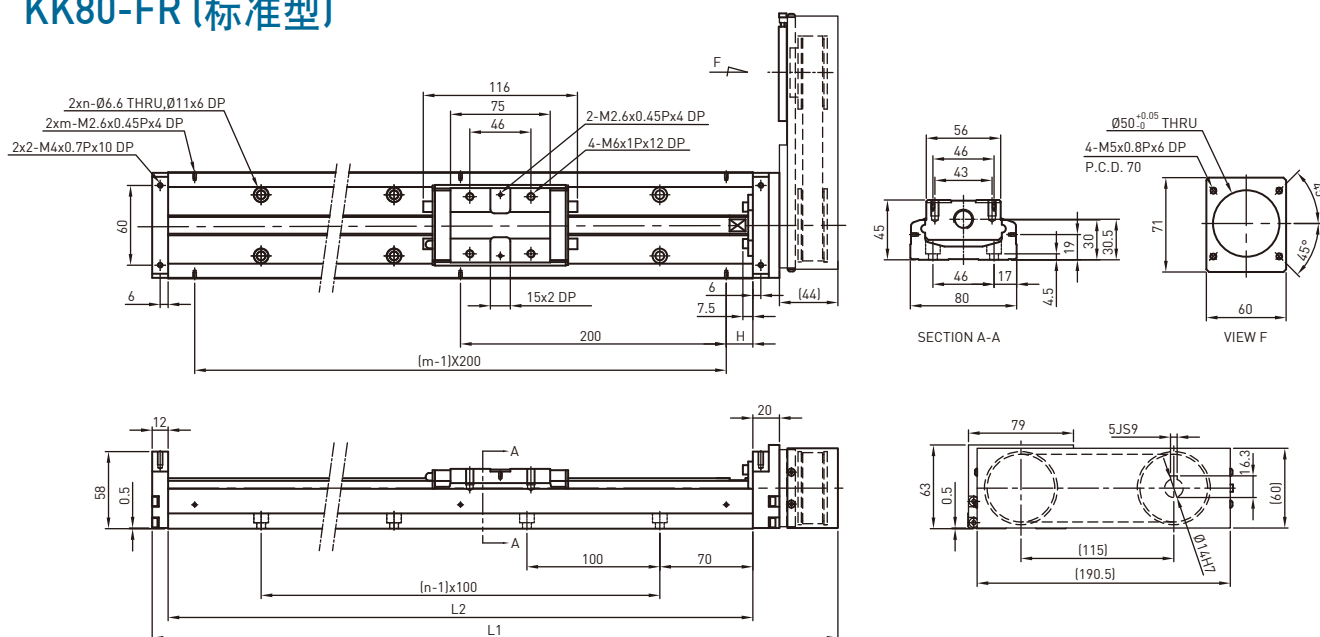


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	416	216.5	108.5	70	3	2	6.1	6.8
440	516	316.5	208.5	20	4	3	7.3	8
540	616	416.5	308.5	70	5	3	8.4	9.1
640	716	516.5	408.5	20	6	4	9.6	10.3
740	816	616.5	508.5	70	7	4	10.8	11.5
840	916	716.5	608.5	20	8	5	12	12.7
940	1016	816.5	708.5	70	9	5	13.2	13.9

KK80-F0 (轻载型)

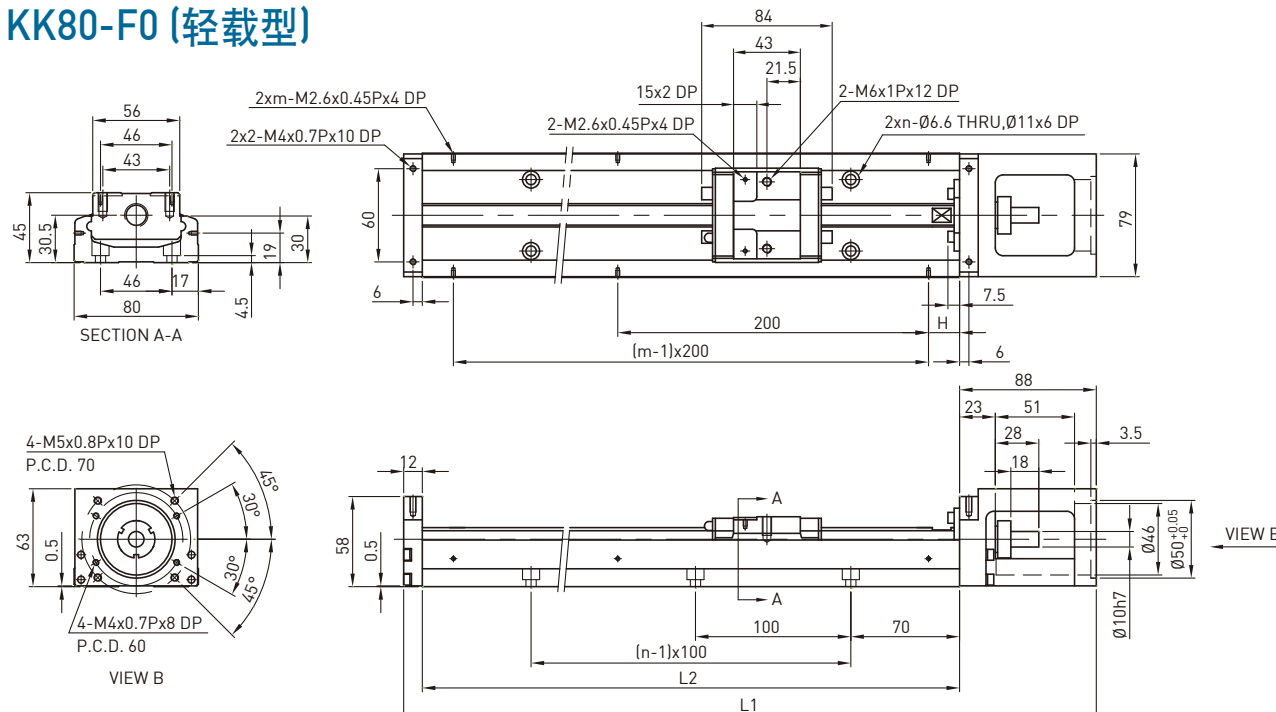


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	440	248.5	172.5	70	3	2	5	5.4
440	540	348.5	272.5	20	4	3	6.2	6.6
540	640	448.5	372.5	70	5	3	7.3	7.7
640	740	548.5	472.5	20	6	4	8.5	8.9
740	840	648.5	572.5	70	7	4	9.7	10.1
840	940	748.5	672.5	20	8	5	10.9	11.3
940	1040	848.5	772.5	70	9	5	12.1	12.5

KK80-FD (轻载型)

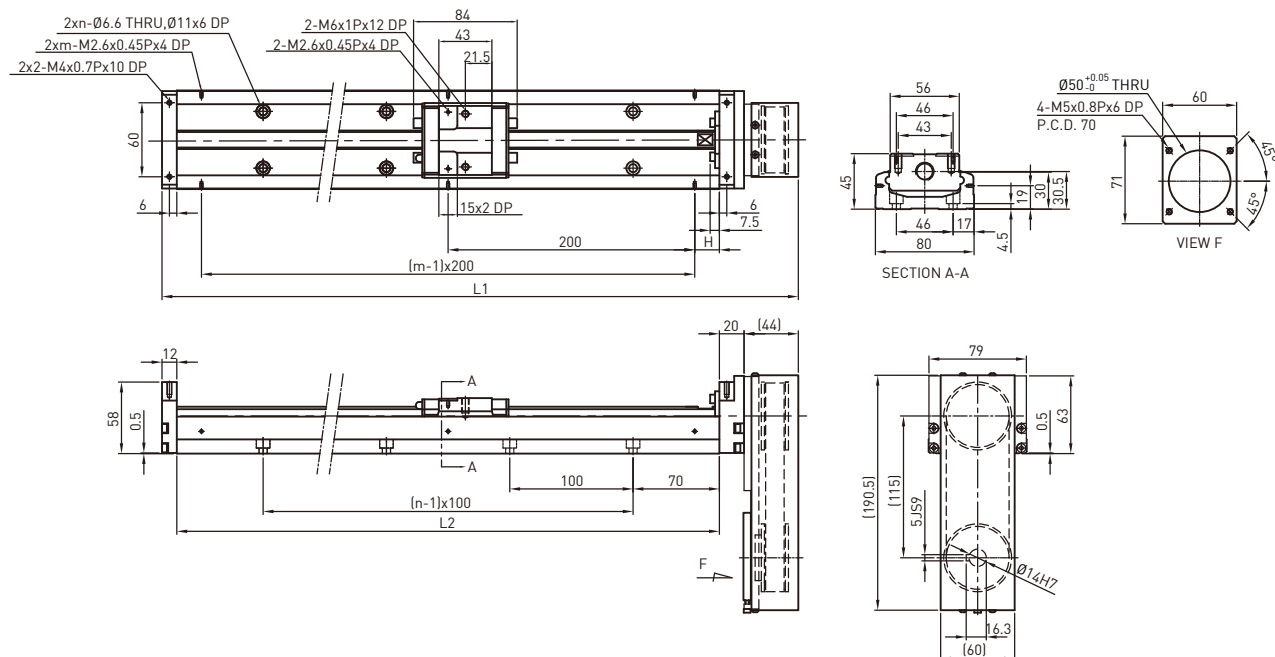


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	416	248.5	172.5	70	3	2	5.8	6.2
440	516	348.5	272.5	20	4	3	7	7.4
540	616	448.5	372.5	70	5	3	8.1	8.5
640	716	548.5	472.5	20	6	4	9.3	9.7
740	816	648.5	572.5	70	7	4	10.5	10.9
840	916	748.5	672.5	20	8	5	11.7	12.1
940	1016	848.5	772.5	70	9	5	12.9	13.3

KK80-FL (轻载型)

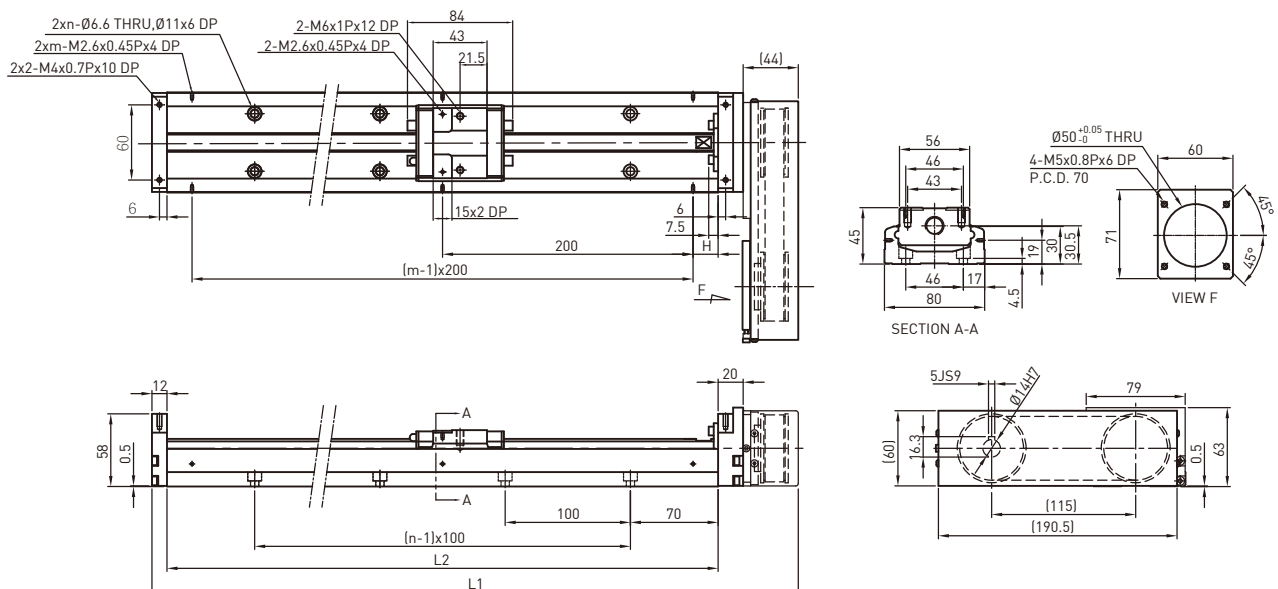


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	416	248.5	172.5	70	3	2	5.8	6.2
440	516	348.5	272.5	20	4	3	7	7.4
540	616	448.5	372.5	70	5	3	8.1	8.5
640	716	548.5	472.5	20	6	4	9.3	9.7
740	816	648.5	572.5	70	7	4	10.5	10.9
840	916	748.5	672.5	20	8	5	11.7	12.1
940	1016	848.5	772.5	70	9	5	12.9	13.3

KK80-FR (轻载型)

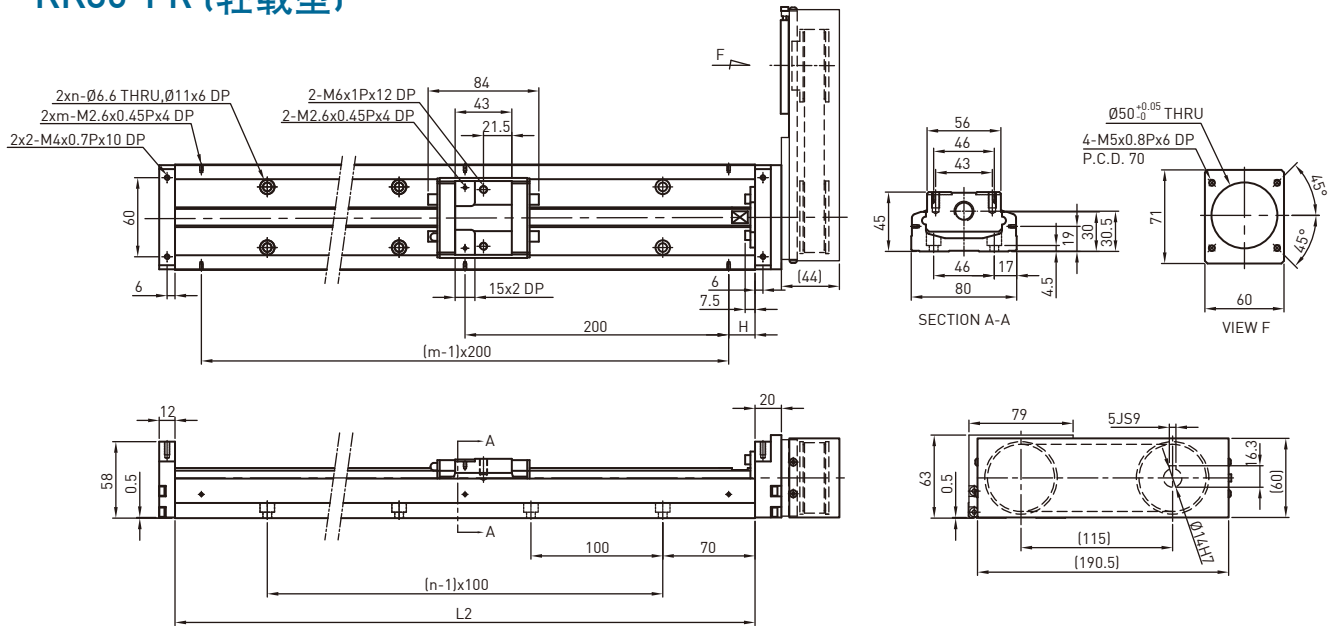

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	416	248.5	172.5	70	3	2	5.8	6.2
440	516	348.5	272.5	20	4	3	7	7.4
540	616	448.5	372.5	70	5	3	8.1	8.5
640	716	548.5	472.5	20	6	4	9.3	9.7
740	816	648.5	572.5	70	7	4	10.5	10.9
840	916	748.5	672.5	20	8	5	11.7	12.1
940	1016	848.5	772.5	70	9	5	12.9	13.3

KK86 (标准型)

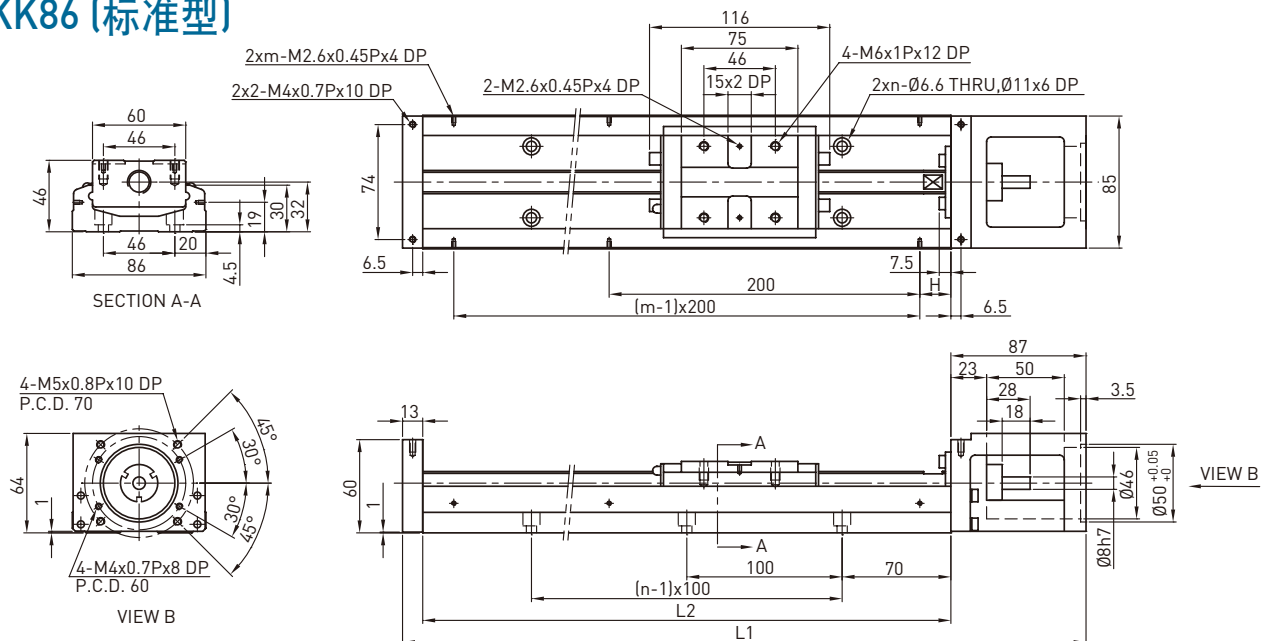

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	440	216.5	108.5	70	3	2	5.7	6.5
440	540	316.5	208.5	20	4	3	6.9	7.7
540	640	416.5	308.5	70	5	3	8.0	8.8
640	740	516.5	408.5	20	6	4	9.2	10.0
740	840	616.5	508.5	70	7	4	10.4	11.2
840	940	716.5	608.5	20	8	5	11.6	12.4
940	1040	816.5	708.5	70	9	5	12.8	13.6