

[illegible]

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	440	248.5	172.5	70	3	2	5.4	5.9
440	540	348.5	272.5	20	4	3	6.6	7.1
540	640	448.5	372.5	70	5	3	7.7	8.2
640	740	548.5	472.5	20	6	4	8.9	9.4
740	840	648.5	572.5	70	7	4	10.1	10.6
840	940	748.5	672.5	20	8	5	11.3	11.8
940	1040	848.5	772.5	70	9	5	12.5	13

SECTION A-A

Dimensions: 60, 46, 46, 20, 86, 4.5, 19, 30, 32, 74, 6.5, 116, 75, 46, 15x2 DP, 4-M6x1Px12 DP, 2x2-M4x0.7Px10 DP, 2xm-M2.6x0.45Px4 DP, 2-M2.6x0.45Px4 DP, 2xn-Ø6.6 THRU, Ø11x6 DP, 200, 7.5, 6.5, 85.


VIEW B

Dimensions: 64, 1, 13, 60, 1, 23, 50, 28, 18, 3.5, 87, 100, 70, 10h7, Ø46, Ø50^{+0.05}/₋₀, VIEW B.

Part Specifications: 4-M5x0.8Px10 DP P.C.D. 70, 4-M4x0.7Px8 DP P.C.D. 60, 4-M6x1Px12 DP, 2xm-M2.6x0.45Px4 DP, 2-M2.6x0.45Px4 DP, 2xn-Ø6.6 THRU, Ø11x6 DP, 2x2-M4x0.7Px10 DP.


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	440	216.5	108.5	70	3	2	5.7	6.5
440	540	316.5	208.5	20	4	3	6.9	7.7
540	640	416.5	308.5	70	5	3	8.0	8.8
640	740	516.5	408.5	20	6	4	9.2	10.0
740	840	616.5	508.5	70	7	4	10.4	11.2
840	940	716.5	608.5	20	8	5	11.6	12.4
940	1040	816.5	708.5	70	9	5	12.8	13.6

KK86D-FD (标准型)

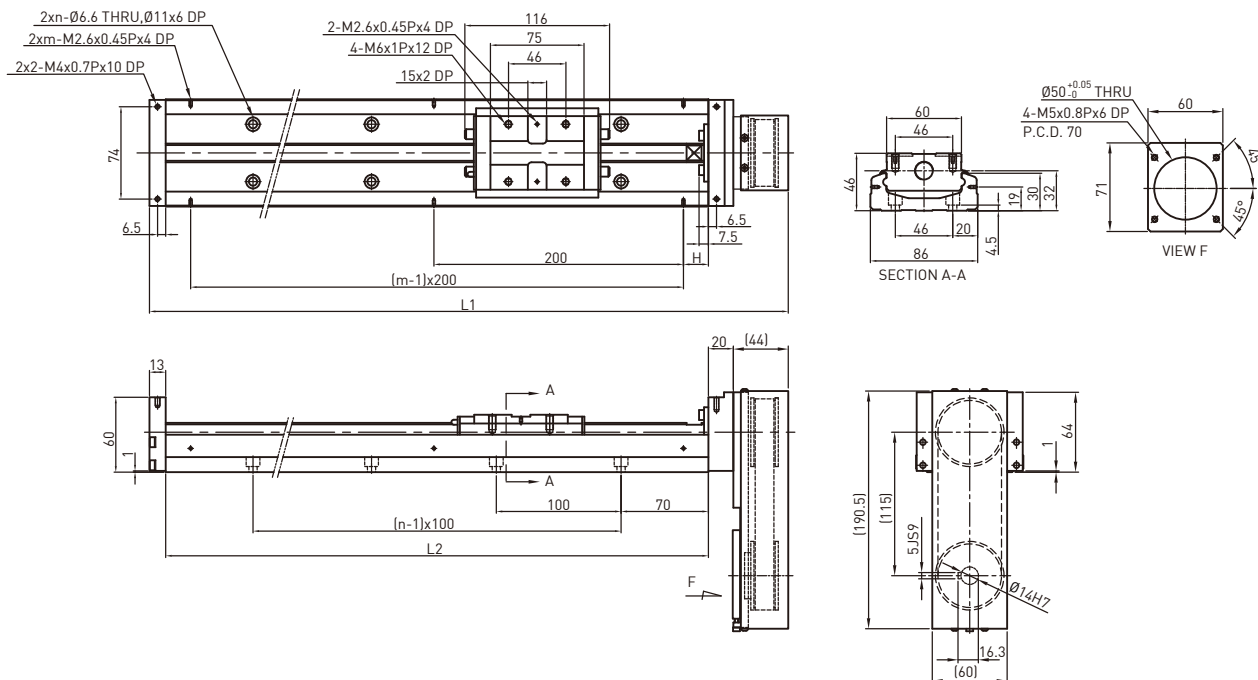


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	417	216.5	108.5	70	3	2	6.5	7.3
440	517	316.5	208.5	20	4	3	7.7	8.5
540	617	416.5	308.5	70	5	3	8.8	9.6
640	717	516.5	408.5	20	6	4	10	10.8
740	817	616.5	508.5	70	7	4	11.2	12
840	917	716.5	608.5	20	8	5	12.4	13.2
940	1017	816.5	708.5	70	9	5	13.6	14.4

KK86D-FL (标准型)

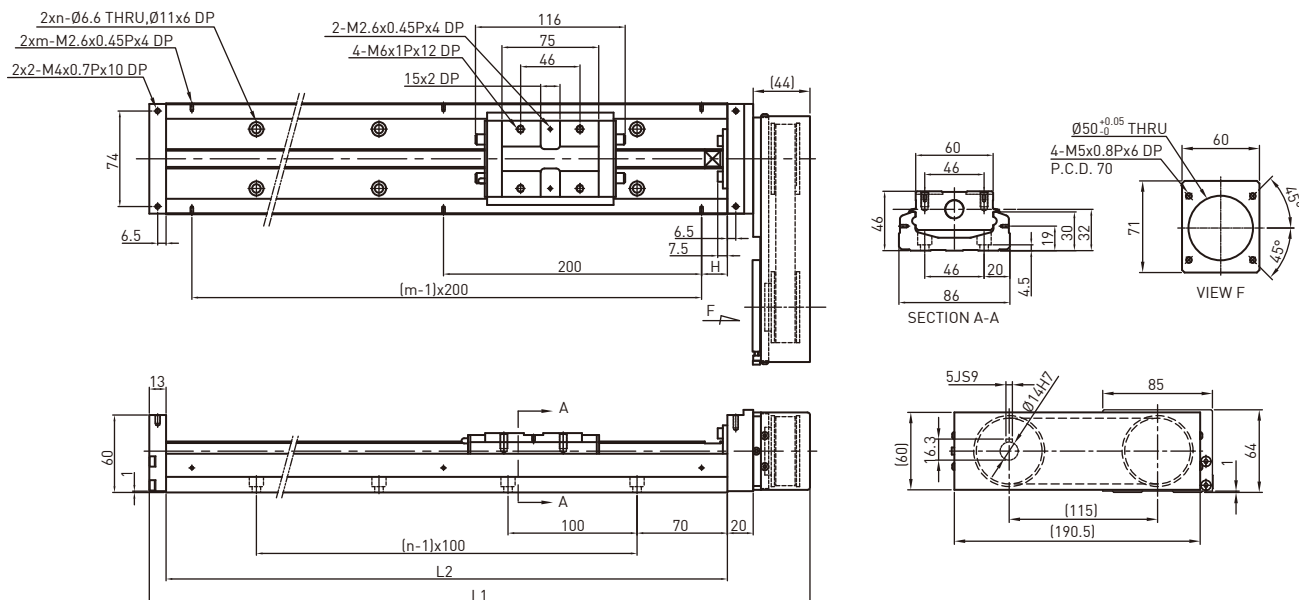


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	417	216.5	108.5	70	3	2	6.5	7.3
440	517	316.5	208.5	20	4	3	7.7	8.5
540	617	416.5	308.5	70	5	3	8.8	9.6
640	717	516.5	408.5	20	6	4	10	10.8
740	817	616.5	508.5	70	7	4	11.2	12
840	917	716.5	608.5	20	8	5	12.4	13.2
940	1017	816.5	708.5	70	9	5	13.6	14.4

KK86D-FR (标准型)

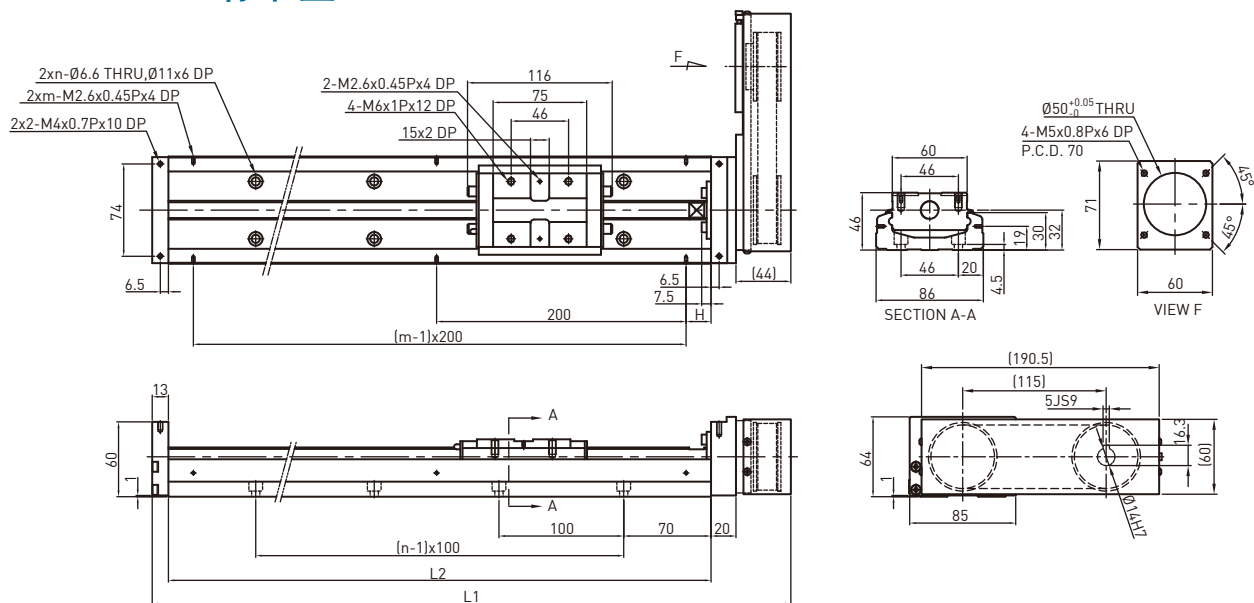



轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座				A1 滑座	A2 滑座
340	417	216.5	108.5	70	3	2	6.5	7.3
440	517	316.5	208.5	20	4	3	7.7	8.5
540	617	416.5	308.5	70	5	3	8.8	9.6
640	717	516.5	408.5	20	6	4	10	10.8
740	817	616.5	508.5	70	7	4	11.2	12
840	917	716.5	608.5	20	8	5	12.4	13.2
940	1017	816.5	708.5	70	9	5	13.6	14.4

KK86D-F0 (轻载型)

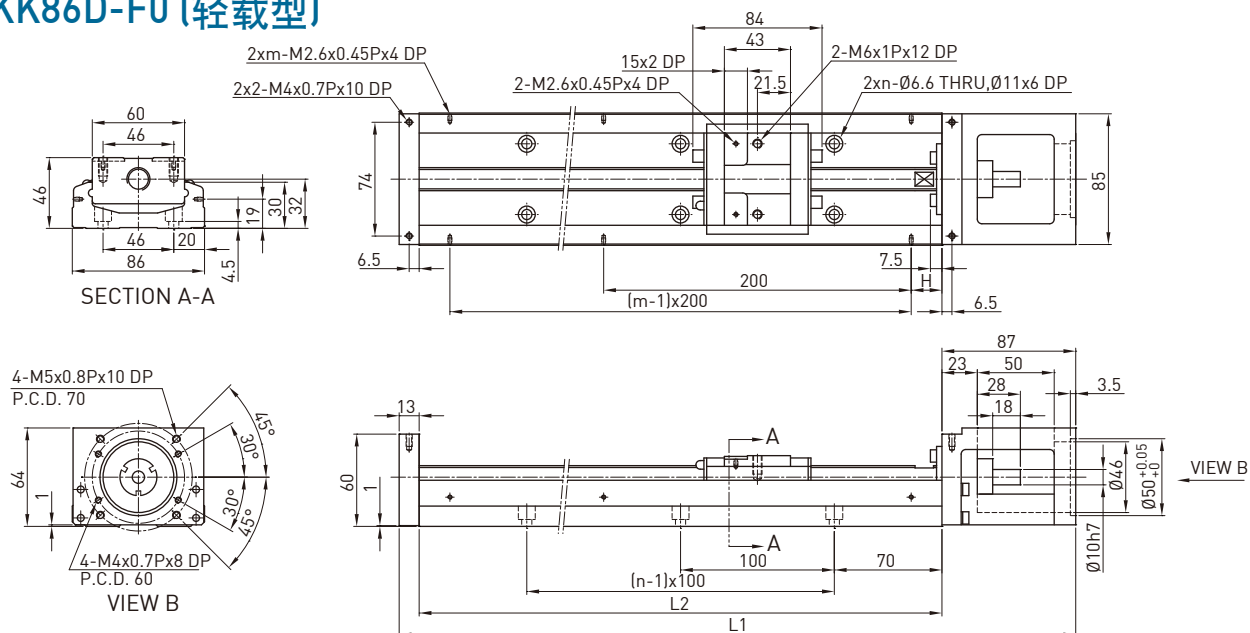



轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	440	248.5	172.5	70	3	2	5.4	5.9
440	540	348.5	272.5	20	4	3	6.6	7.1
540	640	448.5	372.5	70	5	3	7.7	8.2
640	740	548.5	472.5	20	6	4	8.9	9.4
740	840	648.5	572.5	70	7	4	10.1	10.6
840	940	748.5	672.5	20	8	5	11.3	11.8
940	1040	848.5	772.5	70	9	5	12.5	13

KK86D-FD (轻载型)

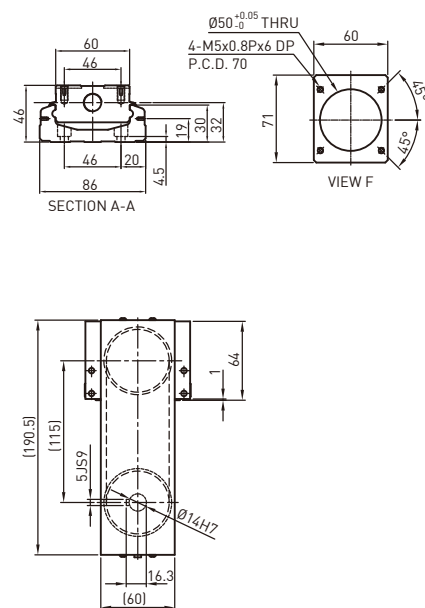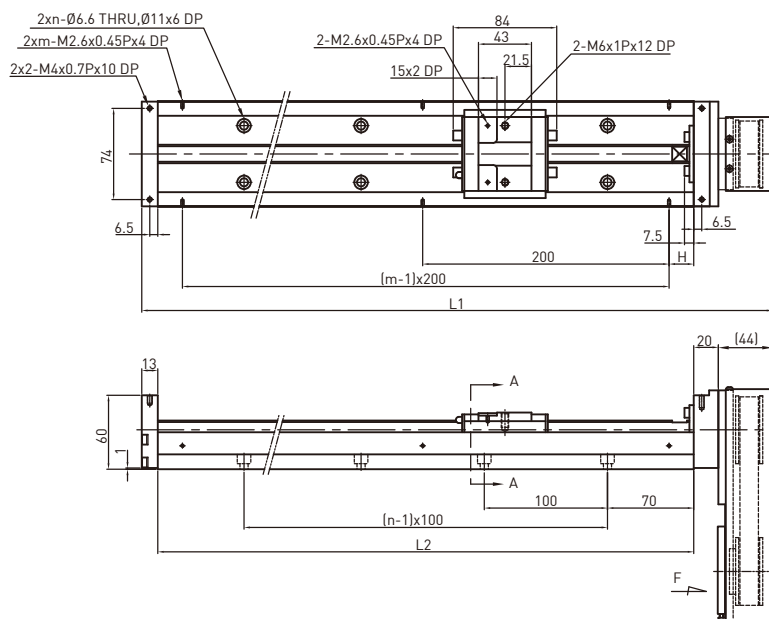


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	417	248.5	172.5	70	3	2	6.2	6.7
440	517	348.5	272.5	20	4	3	7.4	7.9
540	617	448.5	372.5	70	5	3	8.5	9
640	717	548.5	472.5	20	6	4	9.7	10.2
740	817	648.5	572.5	70	7	4	10.9	11.4
840	917	748.5	672.5	20	8	5	12.1	12.6
940	1017	848.5	772.5	70	9	5	13.3	13.8

KK86D-FL (轻载型)

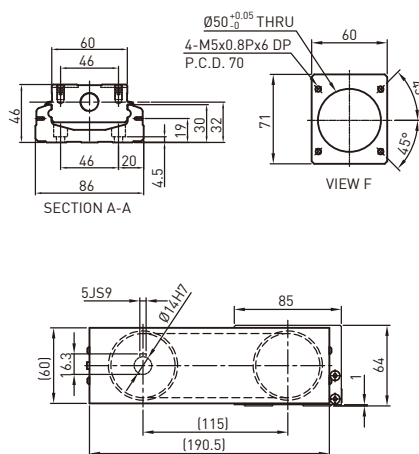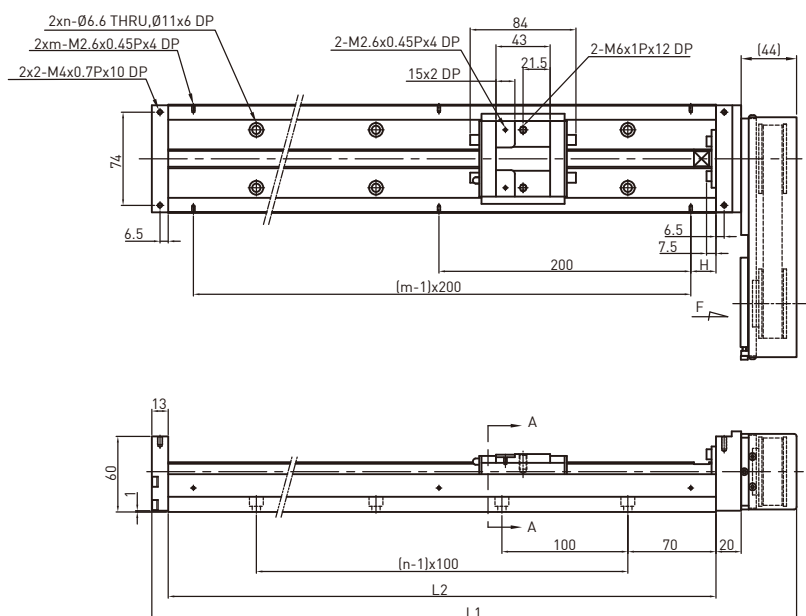


轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	417	248.5	172.5	70	3	2	6.2	6.7
440	517	348.5	272.5	20	4	3	7.4	7.9
540	617	448.5	372.5	70	5	3	8.5	9
640	717	548.5	472.5	20	6	4	9.7	10.2
740	817	648.5	572.5	70	7	4	10.9	11.4
840	917	748.5	672.5	20	8	5	12.1	12.6
940	1017	848.5	772.5	70	9	5	13.3	13.8

KK86D-FR (轻载型)

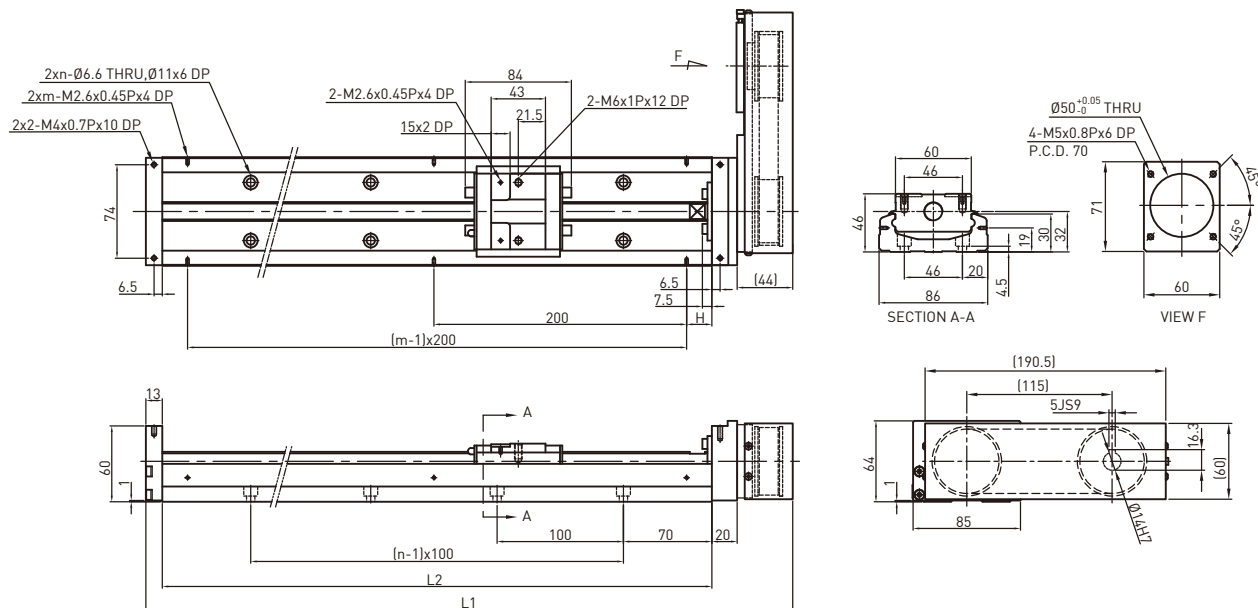

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		H (mm)	n	m	重量 (kg)	
		S1 滑座	S2 滑座				S1 滑座	S2 滑座
340	417	248.5	172.5	70	3	2	6.2	6.7
440	517	348.5	272.5	20	4	3	7.4	7.9
540	617	448.5	372.5	70	5	3	8.5	9
640	717	548.5	472.5	20	6	4	9.7	10.2
740	817	648.5	572.5	70	7	4	10.9	11.4
840	917	748.5	672.5	20	8	5	12.1	12.6
940	1017	848.5	772.5	70	9	5	13.3	13.8

KK100-F0

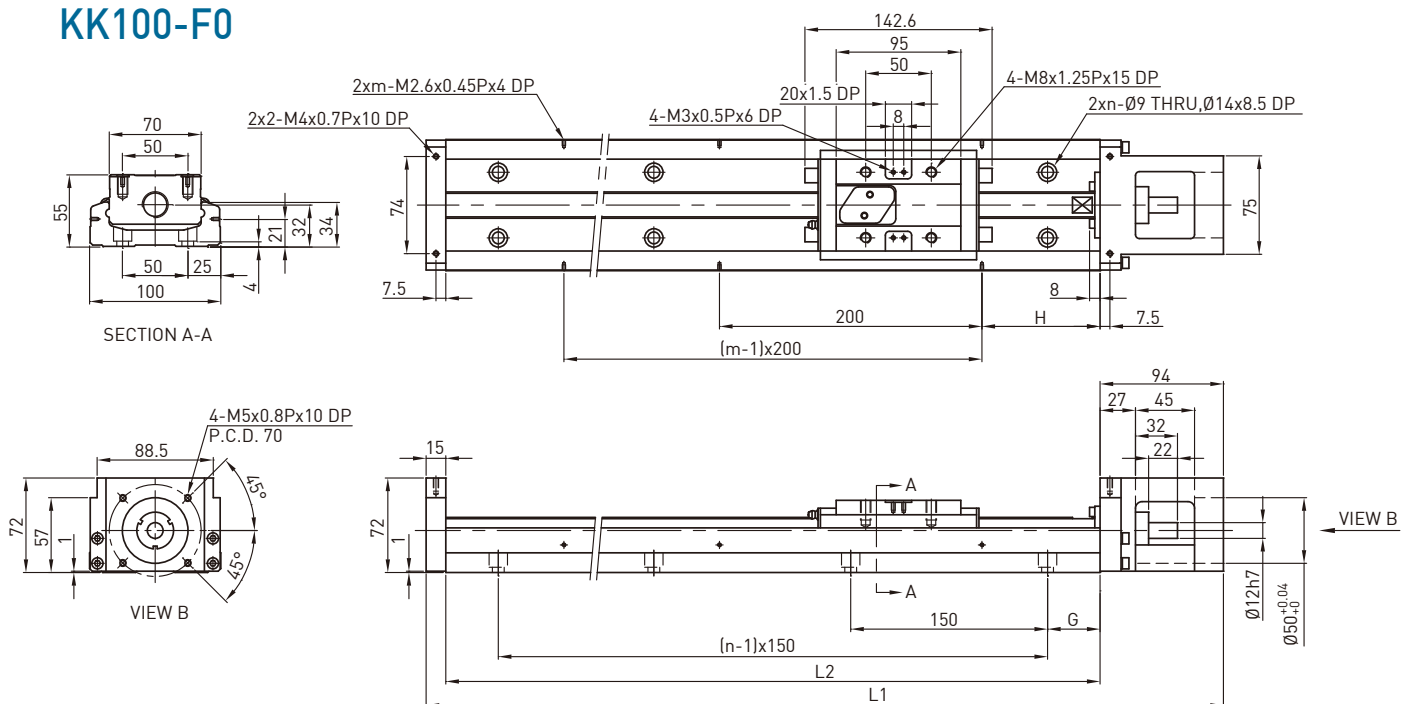

轨道长度 L2 (mm)	全长 L1 (mm)	最大行程 (mm)		G (mm)	H (mm)	n	m	重量 (kg)	
		A1 滑座	A2 滑座					A1 滑座	A2 滑座
980	1089	828	700	40	90	7	5	18.6	20.3
1080	1189	928	800	15	40	8	6	20.3	22.0
1180	1289	1028	900	65	90	8	6	22.0	23.7
1280	1389	1128	1000	40	40	9	7	23.6	25.3
1380	1489	1228	1100	15	90	10	7	25.3	27.0